


裸圧着端子 (R形)

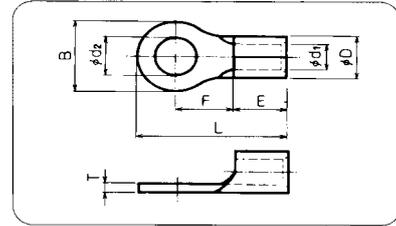

丸形端子

呼 び	在庫	各 部 の 寸 法							適 合 電 線 範 囲			適 合 工 具	一 箱 入 数	
		d ₂	B	L	F	E	D	d ₁	T	単線mm	撚線mm ²			AWG
5.5-V3		3.2	7.2	15.8	5.9	6.3	5.6	3.4	1.0	1.82 ∩ 2.89	2.63 ∩ 6.64	12-10	5N18 214A DH-1B AC-5N-D REC-14A	500
5.5-M3		7.1	18.3	8.5										
5.5-V3.5		7.2	15.8	5.9										
5.5-3.5		3.7	7.7	17.3	7.2									
5.5-M3.5		7.1	18.3	8.5										
5.5-V4		7.2	15.8	5.9										
5.5-S4		4.3	7.7	17.3	7.2									
5.5-M4		7.1	18.3	8.5										
5.5-4		9.5	19.5											
5.5-S5		5.3	8.0	18.8										
5.5-5		9.5	19.5											
5.5-L5		12.0	22.5	10.2										
5.5-S6		6.4	9.5	19.5	8.5									
5.5-6		12.0	22.5	10.2										
5.5-L6		26.3	14.0											
5.5-A6		29.8	16.0											
5.5-8		8.4	15.0	27.3	14.0									
5.5-10		10.5												
5.5-12		13.0	20.0	32.0	15.7									
5.5-14		15.0												
5.5-16		17.0	32.0	48.0	25.7									
5.5-20		21.0												
8-S4		4.3	9.0	21.3	8.3	7.1	4.5	1.2	2.89 ∩ 3.65	6.64 ∩ 10.52	8	5N18 214A REC-14A	400	
8-4		10.0	21.8	8.5										
8-S5		5.3	12.0	23.5										9.2
8-5		12.0	23.5	9.2										
8-S6		6.4	10.0	21.8									8.5	
8-6		12.0	23.5	9.2										
8-A6		31.8	16.0											
8-8		8.4	15.0	29.5									14.0	
8-10		10.5												
8-12		13.0	20.0	34.0									15.7	
8-14		15.0												
8-16		17.0	32.0	50.0									25.7	
8-20		21.0												
14-S4		4.3	10.0	28.5									10.0	9.0
14-S5		5.3	12.0	29.5										
14-5		10.0	28.5	13.5										
14-S6		6.4	12.0	29.5										
14-6		12.0	29.5											
14-S8		8.4	16.0	32.5	15.0									
14-8		16.0	32.5	15.0										
14-10		10.5												
14-12		13.0	22.0	40.6	19.6									
14-14		15.0												
14-16		17.0	30.0	49.0	24.0									
14-20		21.0												
							1.6						100	

- 各呼びの 印は、JIS規格品、UL登録品、CSA登録品です。
- UL登録品又はCSA登録品としてご使用の際は、注文時にご指示ください。カートンがUL品用又はCSA 品用となります。
- 上記寸法表にかぎらず特注品もご相談ください。
- 適合工具欄のREC-1520*は、REC-1520FH、REC-1520FMHの2機種があります。