


# 裸圧着端子 (R形)

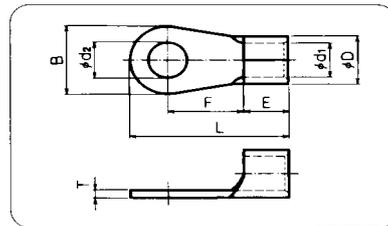

## 丸形端子

呼 び	在庫	各 部 の 寸 法								適 合 電 線 範 囲			適 合 工 具	一 箱 入 数	
		d <sub>2</sub>	B	L	F	E	D	d <sub>1</sub>	T	単線mm	撚線mm <sup>2</sup>	AWG			
80-6		6.4	27.0	53.0	20.5										
80-8		8.4													
80-10		10.5													
80-12		13.0													
80-L8		8.4	32.0	67.0	32.0										
80-L10		10.5													
80-L12		13.0													
80-14		15.0													
80-16		17.0													
80-18		19.0													
80-20		21.0													
80-24		25.0													
100-8		8.4	28.5	54.0	20.8										
100-10		10.5													
100-12		13.0													
100-L8		8.4													
100-L10		10.5	32.0	68.0	33.0										
100-L12		13.0													
100-14		15.0													
100-16		17.0													
100-18		19.0													
100-20		21.0													
100-24		25.0													
150-8		8.4													
150-10		10.5													
150-12		13.0													
150-S14		15.0													
150-S16		17.0	36.0												
150-L8		8.4													
150-L10		10.5													
150-L12		13.0													
150-14		15.0													
150-16		17.0													
150-18		19.0													
150-20		21.0													
150-24		25.0													
150-27		28.0		82.0	37.0										

1. 各呼びの 印は、JIS規格品、UL登録品、CSA登録品です。
2. UL登録品又はCSA登録品としてご使用の際は、注文時にご指示ください。カートンがUL品用又はCSA 品用となります。
3. 上記寸法表にかぎらず特注品もご相談ください。
4. 適合工具欄のREC-1520\*は、REC-1520FH、REC-1520FMHの2機種があります。